arXiv:1212.5463v1 [quant-ph] 21 Dec 2012

Displacement-enhanced entanglement distillation of single-mode-squeezed entangled states

Anders Tipsmark, Jonas S. Neergaard-Nielsen, and Ulrik L. Andersen
Department of Physics, Technical University of Denmark, Fysikvej, 2800 Kgs. Lyngby, Denmark and

(Dated: December 24, 2012)

It has been shown that entanglement distillation of Gaussian entangled states by means of local photon subtraction can be improved by local Gaussian transformations. Here we show that a similar effect can be expected for the distillation of an asymmetric Gaussian entangled state that is produced by a single squeezed beam. We show that for low initial entanglement, our largely simplified protocol generates more entanglement than previous proposed protocols. Furthermore, we show that the distillation scheme also works efficiently on decohered entangled states as well as with a practical photon subtraction setup.

PACS numbers: 03.67.Bg,42.50.Dv,42.50.Ex,03.65.Ud

Continuous variable (CV) entanglement is a valuable resource for many quantum informational protocols [1–3]. However, the performance of these protocols is often limited due to the difficulty in generating CV states with a high degree of entanglement. Moreover, even if a large degree of entanglement can be produced using a highly efficient nonlinear parametric process, the distribution of it (e.g. among two parties in a network) will inevitably lead to dissipation, rendering the state weakly entangled. To improve the performance of quantum information processing, it is therefore important to devise a protocol that increases the amount of entanglement between two distant parties by means of local quantum transformations and classical communication. This can be done by the process of entanglement distillation.

Distillation of non-Gaussian entanglement (either a pure or a mixed non-Gaussian entangled state) can be implemented using simple linear optics [4] as demonstrated in [5, 6]. On the contrary, the distillation of Gaussian states (either pure or mixed Gaussian states) is challenging as it will inevitably require some non-Gaussian transformations [7–9] enabled by a very strong Kerr nonlinearity [10, 11], using a non-Gaussian measurement [12–14], using non-Gaussian resources [15] or using a combination of photon addition and subtraction [16]. An intriguing scheme for entanglement distillation of Gaussian states was suggested by Opatrný et al. [12] and involves local photon subtraction of a two-mode entangled state. The scheme was recently implemented by Takahashi et al [17] (entanglement distillation by non-local photon subtraction has also been demonstrated [18]). This photon subtraction scheme can however be improved by local Gaussian operations: Zhang and van Loock [19] showed that local squeezing operations prior to photon subtraction improve the performance of distillation in terms of producing states with a higher degree of entanglement and with higher success rate. Secondly, it was realized by Fiurášek [20] that by using the much simpler operations of local phase space displacements, a similar improvement can be achieved.

In all these previous proposals on entanglement distillation, the considered Gaussian entangled state was produced by interfering two single mode squeezed states on a beam splitter. However, in practice it is much simpler to generate entanglement from a single squeezed mode that is split on a balanced beam splitter, as was done in [17]. In this letter we investigate the displacement enhanced entanglement distillation of the simplified Gaussian entangled state which will be much closer to an experimental realization. Surprisingly, we find that in some cases the usage of a single mode squeezed beam for the generation of Gaussian entangled states, the degree of entanglement after distillation is higher than if a two-mode squeezed state was used.

We consider the entanglement distillation setup shown in Fig. 1. The entangled state is simply produced by dividing a single mode squeezed state on a balanced beam splitter, and the resulting modes are sent through lossy channels to the two sites, denoted A and B. At these two sites a Gaussian displacement transformation as well as single photon subtractions are applied to distill the quantum state. In the following we first consider the distillation protocol when the channels are loss-free and the photon subtraction is ideal, and secondly we consider the more realistic scenario where the channels are lossy and the photon subtraction process is non-ideal.

Our starting point is a single mode squeezed state mixed with vacuum on a balanced beam splitter (written in the Fock state representation):

$$|\zeta_1\rangle \;=\; U_{BS}(1-\gamma_1^2)^{1/4}\sum_{n=0}^{\infty}\frac{\sqrt{(2n)!}}{n!}\left(\frac{\gamma_1}{2}\right)^n|2n\rangle\,|0\rangle \qquad (1)$$

where U_{BS} is the beam splitter unitary transformation, $\gamma_1 = \tanh(s_1)$ and s_1 is the squeezing parameter. In the weak squeezing limit ($\gamma \ll 1$) the state can be truncated to

$$|\zeta_1\rangle \;\approx\; |00\rangle + \frac{\gamma_1}{\sqrt{2}}\left(\frac{1}{2}|20\rangle + \frac{1}{\sqrt{2}}|11\rangle + \frac{1}{2}|02\rangle\right). \qquad (2)$$

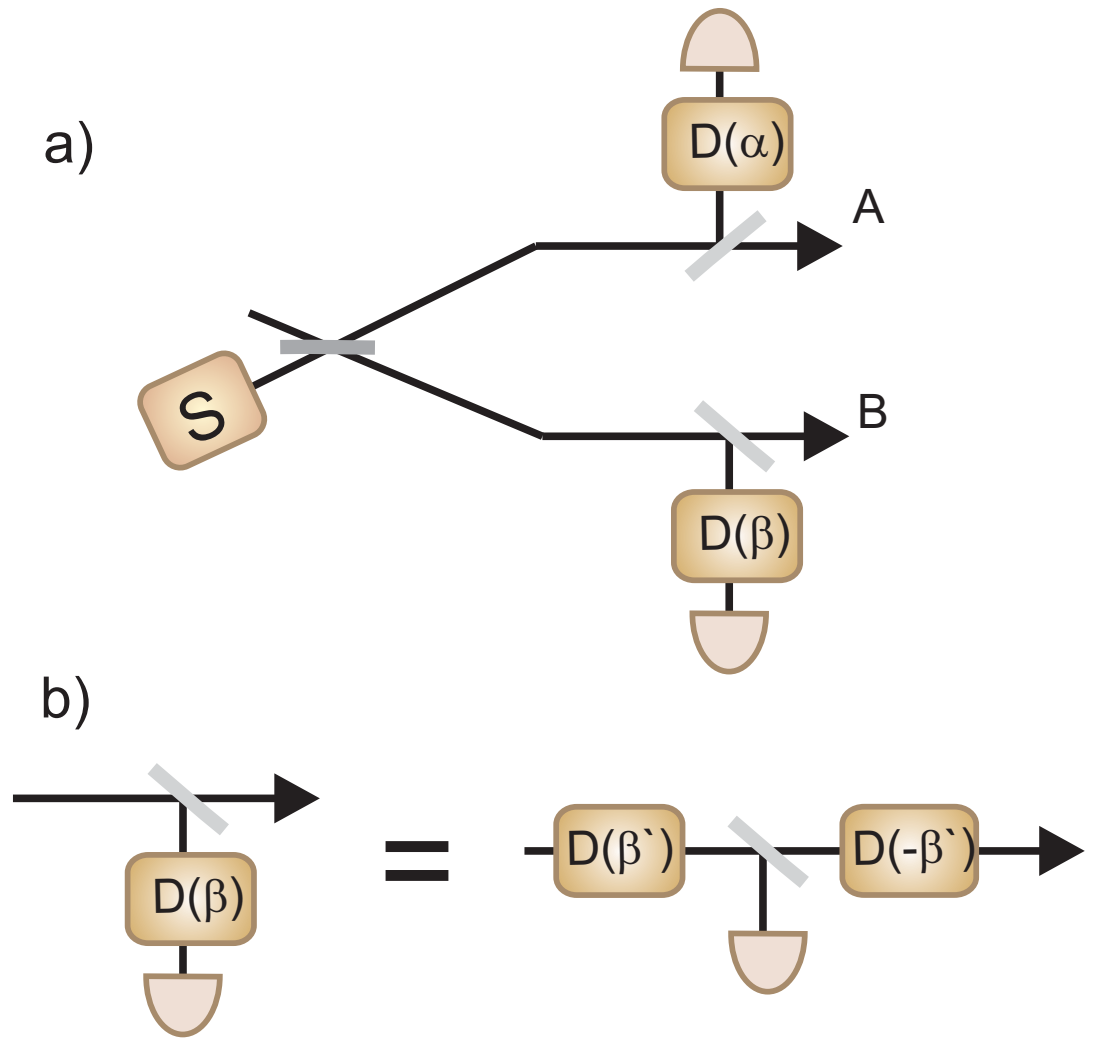

FIG. 1: a) Schematic of the proposed setup. S denotes the single mode squeezed state and $D(\alpha), D(\beta)$ are displacement operations. b) Two equivalent setups for displacement controlled photon subtraction where $\beta' = \sqrt{(1-T)}\beta$ and T is the transmission of the beam splitter.

The entanglement of this state can be quantified by the logarithmic negativity (LN) which is defined as the binary logarithm of the trace norm of the partially transposed density matrix $(|\zeta_1\rangle\langle\zeta_1|)^{T_A}$ [21]. The logarithmic negativity of the state as a function of the average photon number $\langle n\rangle = \gamma_1^2/(1-\gamma_1^2)$ is plotted in Fig. 2a by the black dotted line.

The idea is now to increase the entanglement of the state, and this can be done by removing the vacuum contribution and equalizing the weight of the low order excitation terms. For weak squeezing (as in (2)), it is straightforwardly realized that such an equalization can be obtained simply by performing single photon subtraction on just one of the modes A or B. For single photon subtraction of mode A, enabled by the bosonic annihilation operator a_A, the result is

$$\begin{aligned} |\zeta_1\rangle &\rightarrow \hat{a}_A \otimes \mathbb{I}_B |\zeta_1\rangle & (3)\\ &= \frac{\gamma_1}{2}\left(|10\rangle + |01\rangle\right), & (4)\end{aligned}$$

which is maximally entangled (in the two-dimensional subspace, thus neglecting higher order terms). The resulting entanglement is plotted in Fig. 2a with the black dash-dotted line, and it is shown that for very low squeezing degrees the LN reaches the maximum value of 1 for a 2D Hilbert space. However, the state should be described in a larger Hilbert space in which the state is not maximally entangled. We next consider the simultaneous subtraction of single photons at both sites as described by the operator $\hat{a}_A \otimes \hat{a}_B$ and denoted 2PS (2-Photon-Subtraction). The resulting LN is plotted in Fig. 2a by the black dashed line. In contrast to the previous protocol (with a single photon being subtracted, 1PS), this protocol is not very effective for low average photon numbers but for higher numbers (larger than about 0.21, corresponding to 3.9 dB of squeezing) it becomes more effective.

The entanglement can however be further enhanced for all degrees of initial squeezing by applying a Gaussian transformation prior to photon subtraction. The transformation that leads to this enlargement is the simple phase space displacements, $D(\alpha) = \exp(\alpha a_A^\dagger - \alpha^* a_A)$ and $D(\beta) = \exp(\beta a_B^\dagger - \beta^* a_B)$, where α and β are the complex excitations of the displacements. By implementing these displacements in mode A and B prior to and after the two photon subtractions (see Fig. 1b), the state reads

$$\begin{aligned} |\Psi\rangle &= \left(\alpha\beta + \frac{\gamma_1}{2}\right)|00\rangle + \frac{\gamma_1}{\sqrt{2}}(\beta+\alpha)\frac{|10\rangle + |01\rangle}{\sqrt{2}} \\ &\quad + \frac{\gamma_1}{\sqrt{2}}\alpha\beta\left(\frac{1}{2}|20\rangle + \frac{1}{\sqrt{2}}|11\rangle + \frac{1}{2}|02\rangle\right) + O(\gamma_1^2).\end{aligned}$$

It is clear from this expression that the vacuum and single-photon contributions, which prevent the state from being strongly entangled, can be removed by setting

$$\alpha = -\beta = \sqrt{\frac{\gamma_1}{2}}, \qquad (5)$$

leading to the state

$$|\Psi\rangle = -\frac{\gamma_1^2}{2\sqrt{2}}\left(\frac{1}{2}|20\rangle + \frac{1}{\sqrt{2}}|11\rangle + \frac{1}{2}|02\rangle\right) + O(\gamma^3), \qquad (6)$$

that contains an entanglement of $E_N = 1.54$ for low initial squeezing degrees. This is not maximally entangled in the 3-dimensional Hilbert space due to the unequal weights but it is close to - the maximally entangled state would have $E_N = 1.585$.

The displacements in (5) are maximizing the LN only for low degrees of initial squeezing. For larger squeezing degrees, the optimum displacement deviates from the one in (5), and thus it is not optimized by the removal of the vacuum term. The single-photon components are however always cancelled by the choice of $\alpha = -\beta$. The optimized displacement is plotted in Fig. 2b and the resulting optimized LN is plotted in Fig. 2a (both by black solid curves), and we clearly see that the pre-Gaussian processing improves the entanglement for all average photon numbers [22].

For comparison, we also briefly consider the distillation of a two-mode squeezed state as was treated in Ref. [20]. Here the starting point is

$$|\zeta_2\rangle_{AB} = \sqrt{1-\gamma_2^2}\sum_{n=0}^{\infty}\gamma_2^n |n\rangle_A |n\rangle_B \qquad (7)$$

where $\gamma_2 = \tanh(s_2)$ and s_2 is the two-mode squeezing parameter. This state, which has an average photon

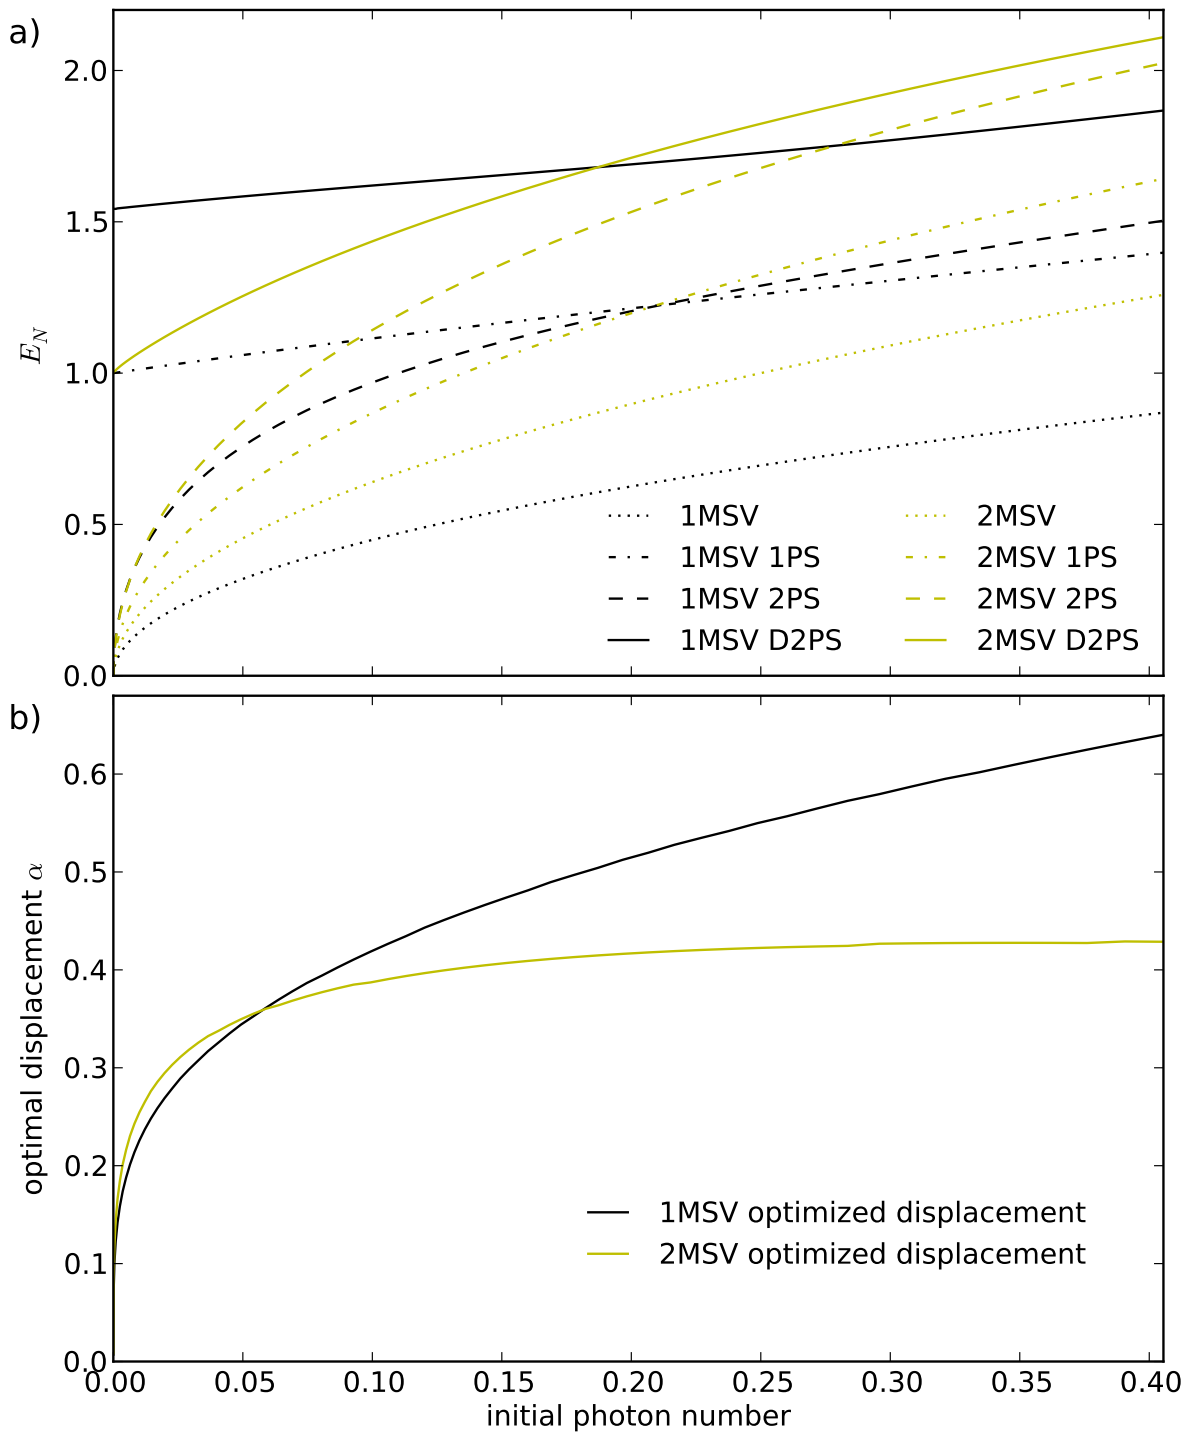

FIG. 2: a) Logarithmic negativity as a function of the average number of photons of the initial squeezed state. 1(2)MSV: Single (two) mode squeezed vacuum states used initially. 1(2)PS: Single (two) photon subtraction. D2PS: Displacement based two-photon subtraction. b) The size of the displacements ($\alpha = -\beta$) that optimise E_N as a function of the average photon number of the resource states.

number $\langle n\rangle = 2\gamma_2^2/(1-\gamma_2^2)$, can be produced by interfering and phase locking two single mode squeezed vacua on a balanced beam splitter. The implementation of a local single photon subtraction, either on one or both sites, transforms the entangled state into another entangled state with higher LN as illustrated in Fig. 2a by yellow curves. Note that for identical initial $\langle n\rangle$, γ_2 is smaller than γ_1.

By displacing the state with excitations of $\alpha_A = -\alpha_B = \sqrt{\gamma_2}$, the distilled state reads $|\psi^{\gamma_2}\rangle = \gamma_2^{3/2}(|10\rangle - |01\rangle) + O(\gamma_2^2)$ for weak initial entanglement ($\gamma_2 \ll 1$). This state is also maximally entangled in the two-dimensional sub space for low initial squeezing as was the case for the 1PS single mode squeezed state in (4).

In particular, we note that the degree of entanglement after distilling the two-mode state using the displacement-enhanced protocol is lower than the one obtained for the single mode scheme if the average photon number is low. That is, using the largely simplified protocol with a single mode squeezer split on a beam splitter (rather than interfering and phase locking two single-mode squeezers) the distillation transformation produces an entangled state that contains more entanglement. However, this conclusion only holds for a low average photon number. For higher photon numbers, the usage of a two-mode squeezed state results in a state with larger entanglement than if a single-mode squeezed state was used. But the low-gain regime is often of interest, since entanglement in this region is fairly easy to prepare, manipulate and maintain.

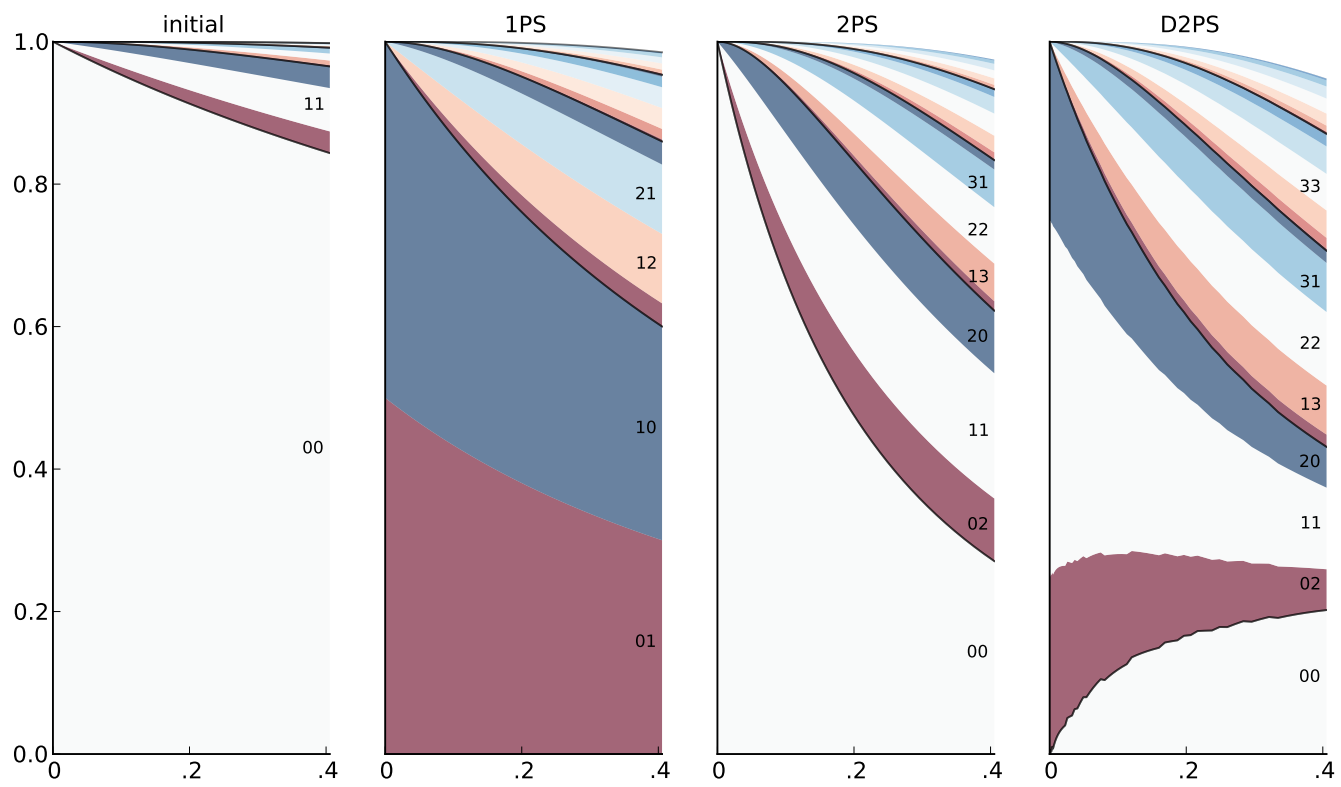

FIG. 3: Distribution of the different eigenstates of the entangled state that is produced from a single squeezed mode. The distributions are for the initial state (before distillation), the single photon subtracted state (1PS), the two photon subtracted state (2PS) and the displacement-enhanced protocol.

It is known that the logarithmic negativity is optimised when the dominant eigenstates of a given state have equal weights as is the case in (4) and partially in (6). To get some physical insight into the formation of stronger entanglement, in Fig. 3 we plot the weights of the different eigenstates resulting from the different distillation protocols using a single mode squeezed state. Due to the very large vacuum contribution in the initial entangled state, it is evident that this state is not highly entangled. However, by implementing the 1PS scheme, the vacuum term is basically split in two new eigenstates ($|01\rangle$ and $|10\rangle$) leading to a large increase in the entanglement. By subtracting two photons (2PS scheme) rather than a single photon, the balancing of the eigenstates is destroyed for low photon numbers, and thus the entanglement is lower. However, it is clear that by implementing the displacement-enhanced scheme (D2PS), the weights between the eigenstates are re-balanced, thereby producing strong entanglement.

We now investigate the performance of the protocol under dissipation. This is of interest as in most protocols the entangled state is distributed in a network connected by lossy channels, thereby rendering the entangled states

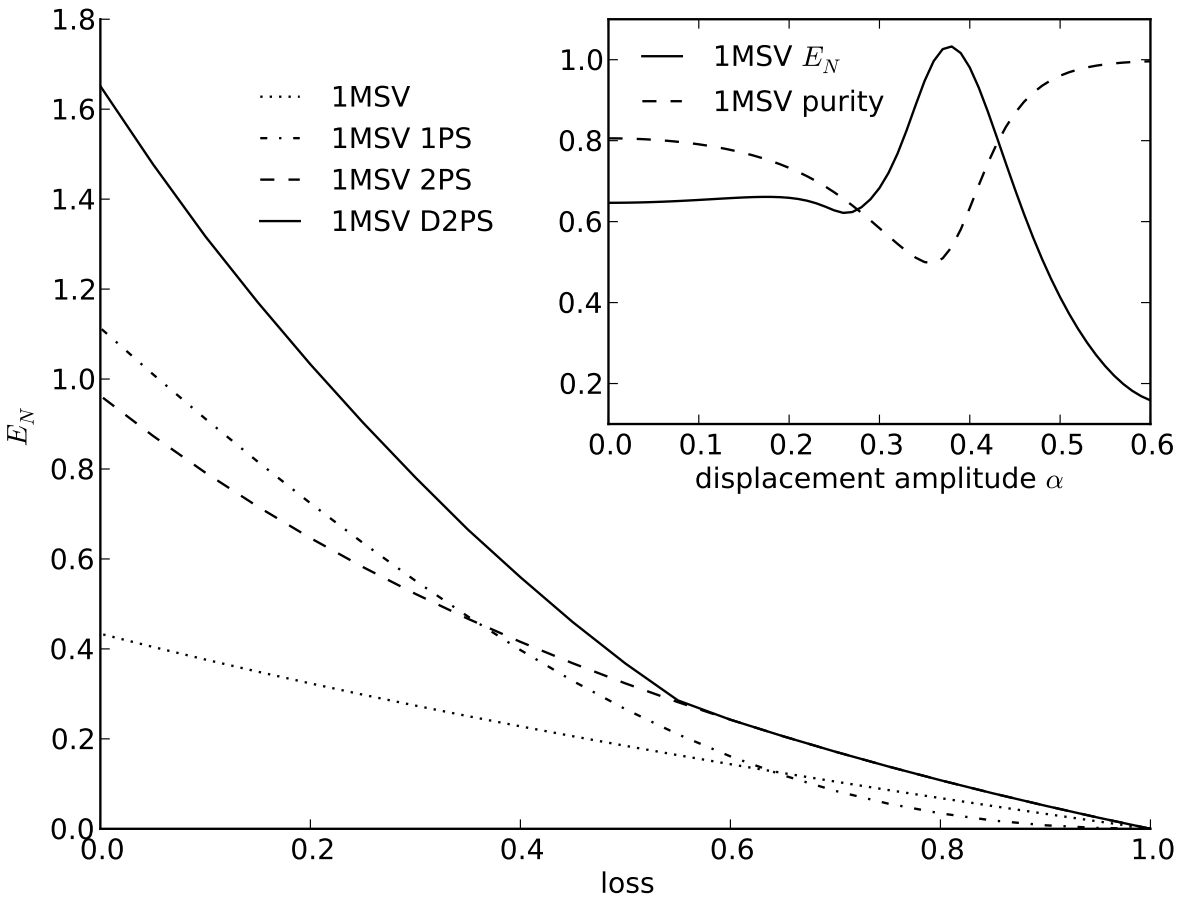

FIG. 4: The logarithmic negativity is plotted as a function of the loss of the two channel. The attenuation is identical in the two channels. See caption of Fig. 2 for abbreviations. Inset: Purity and logarithmic negativity as a function of the displacement amplitude for the case of single mode squeezed vacuum (1MSV), a loss of 20% of the channels and a squeezing parameter of $s = 0.3$ (corresponding to an average photon number of 0.093).

in any practical realization impure. The logarithmic negativity after distillation using the different strategies outlined above for the single mode squeezed state is depicted in Fig. 4 for $s_1 = 0.3$ (corresponding to $\langle n \rangle = 0.093$) as a function of the channel attenuation. It is assumed that the two channels possess identical attenuations. As expected, the LN decrease with the losses, but the effect of displacement-enhanced distillation is clear up to a loss of around 50%. We also find the LN as well as the purity as a function of the displacements as shown in the inset of Fig. 4.

In the above study we have assumed that a single photon is perfectly removed from each of the entangled modes, and we have modelled this by the annihilation operator. This is however an idealization. In practice a photon is usually subtracted by reflecting a small part of the beam on an asymmetric beam splitter, and subsequently measuring the presence of a single photon in the reflected mode. The most practical detector for this purpose is an avalanche photodiode (APD) which is an on/off detector that discriminates between zero photons and some photons. Assuming that the reflectivity of the asymmetric beam splitter as well as the initial average photon number are low, the reflected beam will contain much less than a single photon on average, and thus the APD will effectively work as a single photon counter. On the other hand, for a finite reflectivity and a large initial squeezing, in some rare (although non-negligible) cases two photons will impinge onto the detector which cannot be discriminated from a single photon event. This causes an error.

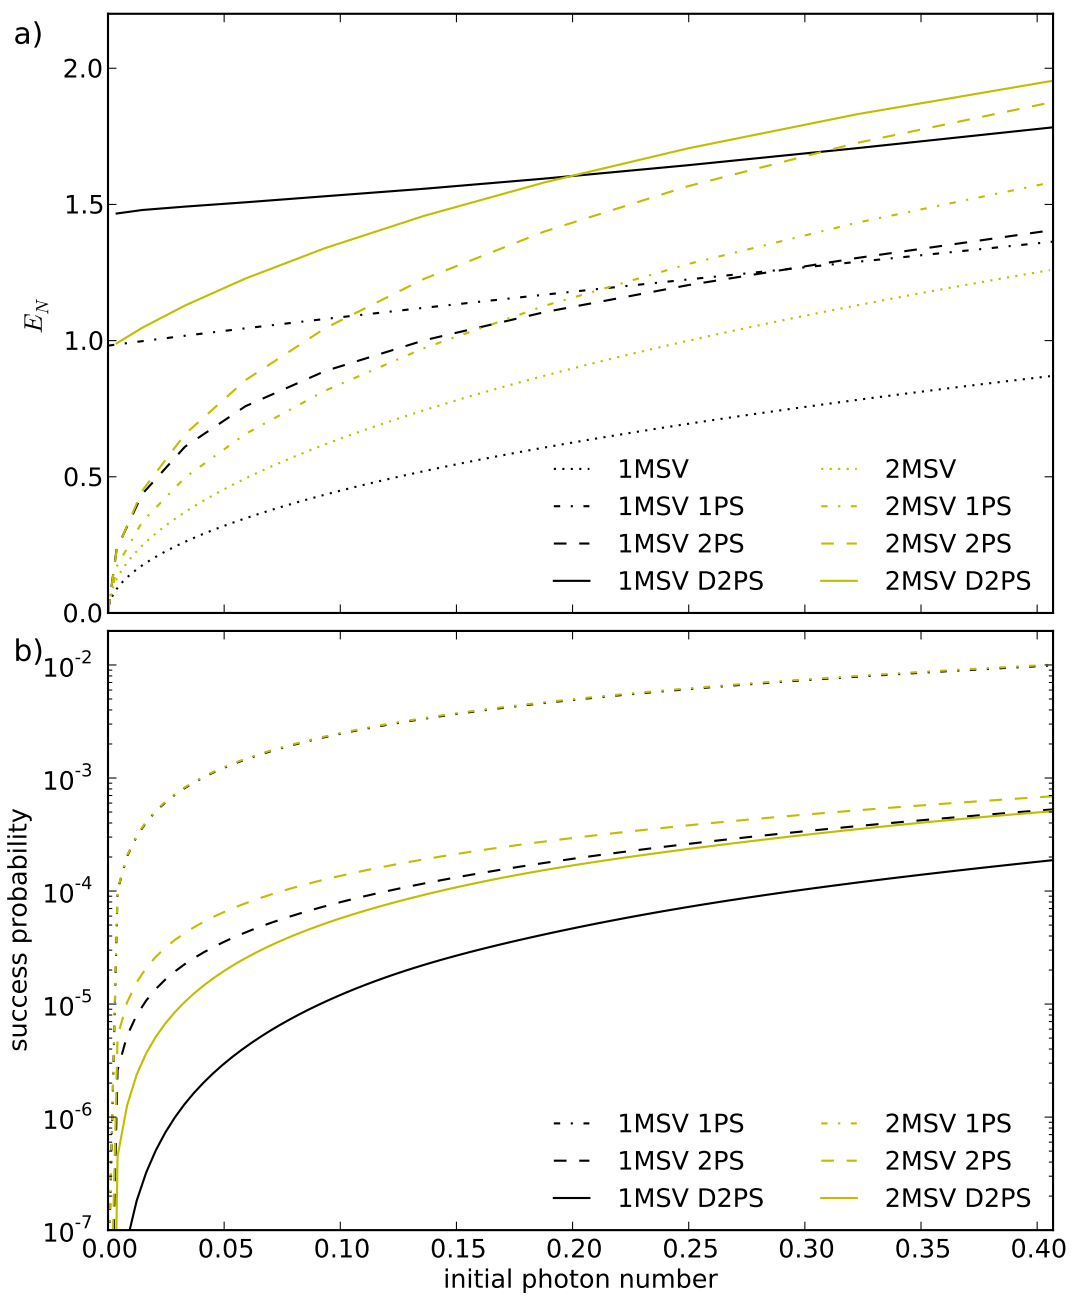

FIG. 5: Performance of the distillation protocol for realistic photon subtraction. a) Logarithmic negativity as a function of the initial average photon number. b) Success probability as a function of the average photon number. See caption of Fig. 2 for abbreviations.

To simulate the realistic setup, we have used a more rigourous model in which the initial state (either (1) or (7)) is transformed through a beam splitter with a reflectivity of 5%, displaced and finally measured with the projector $\Pi = 1 - |0\rangle\langle 0|$. We use the package in Ref. [23] for the simulation. The results (both for the single mode and the two-mode squeezed state) are shown in Fig. 5. It is obvious from the figures that the trend of the LN as a function of the initial average photon numbers is identical to the trend for the ideal distillation scheme in Fig. 2a, but the amount of entanglement is lower in the former case. Another crucial parameter for characterizing the performance of the distillation protocols is the success probability. This is plotted in Fig. 5b. At first it seems counter-intuitive that the success probability decreases when displacement is included, but it can be understood as follows. The rate of the initial photon detection in mode A is indeed increased when displacement is introduced. However, photon subtraction from a squeezed state *increases* its average photon number, so the displacement (which is experimentally implemented by admixture of a coherent state) leads to a *lower* increase in the photon number of mode B after the subtraction in mode A. Furthermore, the displaced photon subtraction results in a state which has a small displacement in phase space (as opposed to the zero-mean of the initial state). The subsequent displacement of mode B before the photon detection there is opposite in direction of the state's displacement, leading to destructive interference in the detected mode. As a result of these two effects, the success probability of the second photon detection is considerably lower with displacement than without, outweighing the increased probability of the first detection.

In conclusion, we have theoretically investigated a displacement-enhanced distillation scheme of entangled states that are produced by a single squeezed mode. We have found that a simple Gaussian displacement operation prior to photon subtraction increases the entanglement of the distilled state. Similar conclusion has been found for the two-mode squeezed state scheme, but in contrast to the previous proposals, the experimental realization of our scheme is much simpler as it does not require the control and phase locking of two independent squeezed beams. An experimental realization is therefore feasible with current technology [24–26].

While preparing this manuscript we were made aware of a related work [27] that builds upon our work in [22]. In Ref. [27], however, the robustness of the distillation scheme to a lossy channel was not investigated.

We acknowledge financial support from the Danish Agency for Science Technology and Innovation.

[1] S. L. Braunstein and P. van Loock, Rev. Mod. Phys. 77, 513 (2005).
[2] U.L. Andersen, G. Leuchs, and Ch. Silberhorn, Laser & Photonics Reviews **4**, 337 (2010).
[3] C. Weedbrook et al, Rev. Mod. Phys. 84, 621 (2012).
[4] D.E. Browne et al, Phys. Rev. A **67** (2003)
[5] R. Dong et al., Nat. Phys. 4, 919 (2008).
[6] B. Hage et al., Nat. Phys. 4, 915 (2008).
[7] J. Eisert, S. Scheel, and M. B. Plenio, Phys. Rev. Lett. 89, 137903 (2002).
[8] G. Giedke and J. I. Cirac, Phys. Rev. A 66, 032316 (2002).
[9] J. Fiurášek, Phys. Rev. Lett. 89, 137904 (2002).
[10] L. M. Duan, G. Giedke, J. I. Cirac, and P. Zoller, Phys. Rev. Lett. 84, 4002 (2000).
[11] J. Fiurášek, L. Miśta, and R. Filip, Phys. Rev. A **67**, 022304 (2003).
[12] T. Opatrný, G. Kurizki, and D.-G. Welsch, Phys. Rev. A 61, 032302 (2000).
[13] P. T. Cochrane, T. C. Ralph, and G. J. Milburn, Phys. Rev. A 65, 062306 (2002).
[14] S. Olivares, M. G. A. Paris, and R. Bonifacio, Phys. Rev. A 67, 032314 (2003).
[15] G.Y. Xiang et al, Nature Photonics **4**, 316 (2010).
[16] Y. Yang and F. L. Li, Phys. Rev. A 80, 022315 (2009).
[17] H. Takahashi et al, Nature Photonics 4, 178 (2010).
[18] A. Ourjoumtsev et al, Phys. Rev. Lett. 98, 030502 (2007).
[19] S.L. Zhang and P. van Loock, Phys. Rev. A **84**, 062309 (2011).
[20] J. Fiurášek, Phys. Rev. A 84, 012335 (2011).
[21] G. Vidal and R. F. Werner, Phys. Rev. A 65, 032314 (2002)
[22] A. Tipsmark, PhD dissertation, Technical University of Denmark, May (2012)
[23] J.R. Johansson, P.D. Nation, and F. Nori, Comp. Phys. Comm. **183**, 1760 (2012).
[24] A. Tipsmark et al, Phys. Rev. A 84, 050301(R) (2011).
[25] J. S. Neergaard-Nielsen et al, Phys. Rev. Lett. 105, 053602 (2010).
[26] N. Lee et al, Science 332, **330** (2011).
[27] O. Černotík and J. Fiurášek, Phys. Rev. A **86**, 052339 (2012).